

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

**(19) World Intellectual Property Organization
International Bureau**



A standard linear barcode located at the bottom of the page, used for tracking and identification of the publication.

(43) International Publication Date
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number
WO 2004/005438 A1

(51) International Patent Classification⁷: C10J 3/46,
3/48, 3/78, 3/74

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TI, TZ, UA, UG, US, UZ,
VN, YU, ZA, ZM, ZW

(21) International Application Number:
PCT/EP2002/007365

(22) International Filing Date: 2 July 2002 (02.07.2002)

(25) Filing Language: English

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SI, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(26) Publication Language: English


(71) Applicant (*for all designated States except US*): SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V. [NL/NL]; Carol van Bylandtlaan 30, NL-2596 HR The Hague (NL).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR GASIFICATION OF A SOLID CARBONACEOUS FEED AND A REACTOR FOR USE IN SUCH A METHOD

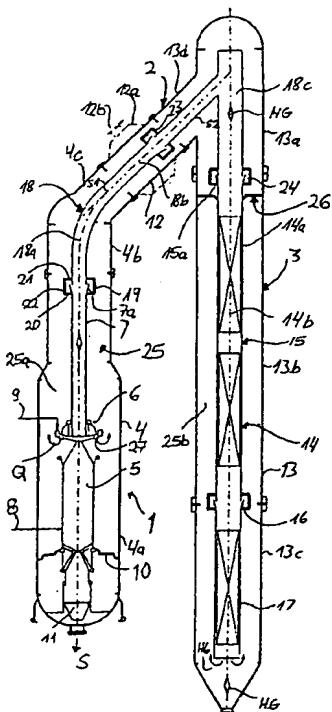

(57) Abstract: A method for gasification of a solid carbonaceous feed, wherein said gasification is performed in an elongated gasification reactor vessel comprising a gasifier unit, a co-axial positioned cooled channel through which the dust-loaded hot-gaseous product of the gasifier unit is discharged from the reactor, and means to supply a quench gas to the dust-loaded hot gaseous product at a position downstream of said gasifier unit, wherein to an annular space between the reactor vessel wall and the cooled channel a dust-free gas is supplied at a rate sufficient to ensure that no dust-loaded hot gas will flow from the cooled channel to said annular space.

WO 2004/005438 A1